



BIG DAISHOWA

NEW!

INDEXABLE FACE MILLS

Uniquely Designed
High Performance
Indexable Face
Mill Types

ø50mm, ø63mm, ø80mm,
ø100mm, ø125mm & ø160mm



A PRODUCT OF:


BIG KAISER[®]
PRECISION TOOLING INC.

Higher Performance. Guaranteed.

SPEED FINISHER


High Speed Cutter for Aluminum and Cast Iron

Each cutting edge height is adjustable to within 1µm of each other.

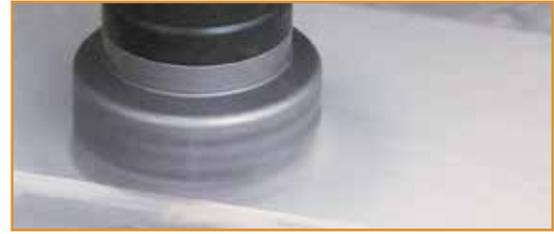


Quick Adjustment of Cutting Edge Height

After clamping the insert, the lifting screw lifts up the insert directly by revolving the lifting nut from the side. Simple construction aids in easy adjustment and the fine pitch thread of the lift screw ensures precise adjustment.

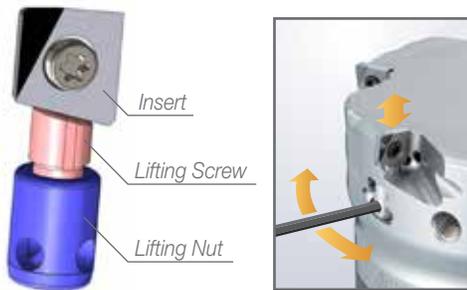

Light Weight & High Rigidity

The low-profile cutter body enhances rigidity, minimizes vibration and distortion, which leads to the minimized height difference of the machined surface. Lighter weight resulting from reduced mass aids performance on small machine tools such as BT30 spindles.



Exclusive PL Presetter shortens the setup time further (up to 15 sec/insert) while avoiding chipping of the cutting edge.






Secure Coolant Supply to the Cutting Edges


Coolant is supplied to the cutting edge directly when used in combination with the Face Mill Arbor Type FMH. This is especially effective in avoiding built-up edges when cutting aluminum and possible re-cutting of the swarf.



Application Examples (Cutter Diameter: ø80mm)

Workpiece	Conditions	Surface Roughness	Height Difference	No. of Workpieces	Result
Crank case ADC12 	Cutting Speed: 13,123 SFM Spindle Speed: 15,900 RPM Feed Rate: 376 IPM D.O.C.: .098"	Ra=.08µm Rz=.55µm	Within 1µm	24,000	Rough & finish processes are combined in a single operation
Parts of semiconductor manufacturing equipment A5052 	Cutting Speed: 13,123 SFM Spindle Speed: 15,900 RPM Feed Rate: 376 IPM D.O.C.: .079"	Ra=.07µm Rz=.32µm	Within 1µm	320	Mirror finish is achieved
Machine tool bed FC250 	Cutting Speed: 4,921 SFM Spindle Speed: 6,000 RPM Feed Rate: 142 IPM D.O.C.: .020"	Ra=.12µm Rz=.67µm	Within 2µm	20	1-2µm flatness is obtained



SPEED FINISHER BODY, INSERTS, CUTTING CONDITIONS & SPARE PARTS

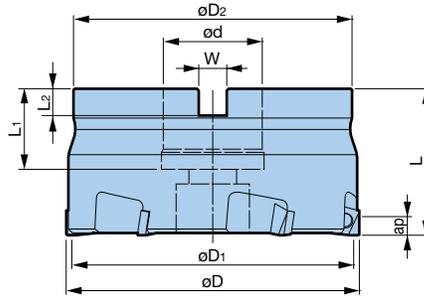

Speed Finisher

Catalog Number	ϕD	ϕD_1		ϕD_2	ϕd	L	L ₁	L ₂	W	No. of inserts	Max RPM	Weight (lbs.)
		DA2200	CBN									
FM22-PLS505-35	50	46.9	44.9	47	22	35	19	6	10.4	5	20,000	.88
FM22-PLS636-35	63	59.9	57.9	60	22	35	19	6	10.4	6		1.54
FM27-PLS806-40	80	76.9	74.9	76	27	40	22	7	12.4	6	16,000	2.65
FM32-PLS1006-42	100	96.9	94.9	96	32	42	24	8	14.4	6	12,800	4.40
FM40-PLS1258-50	125	121.9	119.9	96	40	50	28	10	16.4	8	10,000	5.50
FM40-PLS16010-50	160	156.9	154.9	96	40	50	28	10	16.4	10	8,000	7.10

- All dimensions shown in millimeters
- Wrench and screws are included
- Inserts must be ordered separately
- When using at 12,000 RPM or higher, contact BIG Kaiser agent for balancing of the cutter and arbor assembly
- Effective cutting edge length ap varies depending on insert models—refer to the table for insert shown below
- Adjusting amount of cutting edge is .004" — note this when using reground insert



Inserts

Insert Model	Workpiece	Fig.	Material	Cutting Edge Length (ap)
PL0705 DA2200	Aluminum & Nonferrous	1	Diamond	5.0
PL0705 CBN	Cast Iron	2	CBN	0.5

Insert Grade

DA2200	CBN
High density sintered material made of ultra-micro diamond particles. Superior wear resistance and hardness comparable to carbide alloy.	Newly designed CBN sintered body with high content rate of CBN improves toughness and thermal conductivity.

- All dimensions shown in millimeters
- Each insert is packed in a case (order example: PL0705 DA2200 5 pcs.)
- Regrinding of the insert is possible only once (grinding amount .2mm)
- Early regrinding is recommended, since regrinding becomes unavailable after excessive wear or once chipping occurs

Recommended Cutting Conditions

Workpiece Material		Insert Material	Cutting Speed (SFM)	Feed Rate (IPT)	Coolant
Aluminum Alloy	Si content 13% \geq	DA2200	6,562-13,123	.002-.008	Wet
	Si content 13% $<$		1,312-2,625		
Copper Alloy		DA2200	1,640-8,202	.002-.008	Wet
Gray Cast Iron		CBN	2,625-6,562	.004-.012	Dry

- The table is a reference to determine cutting conditions and it should be adjusted according to cutting width and conditions of the machine tool and workpiece

Spare Parts

Lifting Screw Set	Insert Clamping Screws	Wrench	Anti-Seizure Lubricant
Lifting Screw 1 pc. Lifting Nut 1 pc.	Screw 10 pcs. Wrench 1 pc.		5g included
Catalog Number	Catalog Number	Catalog Number	Catalog Number
LSN35	S2506DS	DA-T8	BN-5

- Insert clamping screws and wrenches are consumables, therefore regular replacement and extra stock are recommended


FULLCUT MILL FCM ARBOR TYPE BODY & INSERTS

FULLCUT MILL FCM

CUTTER DIAMETER: ϕ 50mm, ϕ 63mm, ϕ 80mm & ϕ 100mm

Arbor Type for Square Shoulder & Face Milling

Conforms to Form FMH of the new standard face milling adaptors.



Arbor Type Form FMH / FMC

Cutter Dia. ϕD	Catalog Number	ap	ϕd	ϕD_1	L	L ₁	L ₂	W	No. of Inserts	Insert Size	Weight (lbs.)
50	FMH22-FCM50115-40	11	22	47	40	20	6	10.4	5	ARG40	.5
63	-FCM63116-40		22	47	40	20	6	10.4	6	ARG63	.7
80	FMH27-FCM80116-50	11	27	60	50	22	7	12.4	6	ARG80	1.2
100	-FCM100116-50		27	76	50	22	7	12.4	6	ARG80	2.8

- All dimensions shown in millimeters
- Wrench and screws are included
- Inserts must be ordered separately



Indexable Inserts

Cutter Dia. ϕD	Insert Model	ap	Nose R	P		M	K	N
				ACP200	ACP300	ACZ350S	ACZ310	DS20
50	ARG401102	11	.2		○	○	○	○
	ARG401104	11	.4	○	○	○	○	○
63	ARG631108	11	.8	○	○	○	○	○
80, 100	ARG801108	11	.8	○	○	○	○	○

- Inserts are available in packages of 10 pcs.
- Please clarify the insert type and model when ordering (For example, use ordering code: ARG401104ACP300)

CAUTION

It is important to use the correct insert for the specific diameter of Fullcut Mill. Failure to use the correct insert will result in incorrect cutting conditions and poor results.

Marking Description



Insert Classifications


ISO Material	Grade	Material	Coating
P20	ACP200	Prehardened Steel	TiAlN/AlCrN
P30	ACP300	General Steel	
M30	ACZ350S	Stainless Steel	TiAlN/TiCN
K10	ACZ310	Cast Iron	
N20	DS20	Aluminum	DLC

Selection Between ACP200 & ACP300 for Steel

ACP200 is superior in anti-wear resistance, while ACP300 is superior in its anti-chipping property. ACP300 is the first recommendation for cutting steel.

Choose ACP200 over ACP300 in cases where further speed or wear-resistance is needed. ACP200 is not, however, recommended for either heavily-interrupted or heavy-duty cutting.

Spare Parts

		<i>Insert Clamping Screw Set</i>	<i>Wrench</i>	<i>Anti-seize Lubricant</i>
		 10 screws & 1 wrench		 A tube contains 5g
Cutter Dia.	Insert Model	Catalog Number	Catalog Number	Catalog Number
50	ARG4011□□	S3508DS	DA-T15	BN-5
63	ARG631108			
80, 100	ARG801108			

- It is recommended to regularly replace clamping screws and wrench to ensure the correct clamping force is maintained
- All dimensions shown in millimeters

Finish-Light Cutting

Cutter Dia.	Work Material	Carbon Steel Alloy Steel	Unalloyed Steel	Prehardened Steel <HRC40	Stainless Steel	Cast Iron	Aluminum
	Insert Grade	ACP300		ACP200	ACZ350S	ACZ310	DS20
	Cutting Fluid	Dry			Dry/Wet	Dry	Dry/Wet
ø50 ø63 ø80 ø100	Speed (SFM)	330-725	500-800	250-400	400-600	330-650	650-5000
	Feed (IPT)	.004-.010	.004-.009	.003-.006	.005-.008	.004-.010	.004-.014

CAUTION

Fullcut Mill FCM Arbor Type cannot be used for feeding Z-axis such as ramping, plunging and boring.

Medium-Heavy Cutting

Cutter Dia.	Work Material	Carbon Steel Alloy Steel	Unalloyed Steel	Stainless Steel	Cast Iron	Aluminum
	Insert Grade	ACP300		ACZ350S	ACZ310	DS20
	Cutting Fluid	Dry			Dry/Wet	Dry
ø50 ø63 ø80 ø100	Speed (SFM)	330-725	500-800	400-600	330-650	650-5000
	Feed (IPT)	.003-.007	.003-.006	.005-.006	.004-.008	.004-.012

CAUTION

This table is a general guideline for cutting data. Please adjust according to machine and workpiece conditions, as well as width of cutting. Dry cutting (including air blow) is recommended when cutting steel, except for finishing. Dry cutting is recommended for stainless steel. However, use soluble oil in a case where severe built-up edge occurs.

Indexable Insert Face Mill Achieving Excellent Squareness and Fine Surface Finish



Machined by Fullcut Mill Model: FMH22-FCM63116-40
Arbor Model: BBT40-FMH22-27-45

Squareness

Cutting Speed (SFM)	500
Feed Rate (IPT)	.004"
Axial DOC (Ad)	.20"
Radial DOC (Rd)	.004"

	.0004"
Other manufacturer	.0016"

Wiper Cutting Edge

Cutting Speed (SFM)	825
Feed Rate (IPT)	.008"
Axial DOC (Ad)	.004"
Radial DOC (Rd)	2"


	Ra=.51µm
Other manufacturer	Ra=1.56µm

SURFACE MILL

45° APPROACH FACE MILL & INSERTS


SURFACE MILL

CUTTER DIAMETER: $\phi 80\text{mm}$
45° Approach Face Milling Cutter

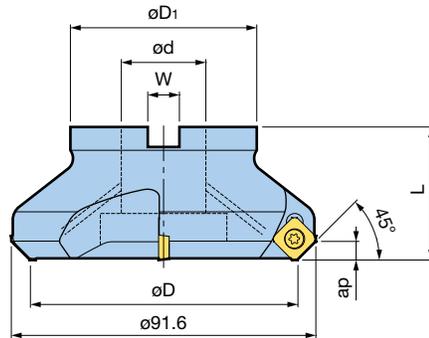

Cutter Dia. ϕD	Catalog Number	a_p	ϕd	ϕD_1	L	W	No. of Inserts	Insert Size	Weight (lbs.)
80mm	FM25.4-SFM804-40	.200	1.000	2.205	1.575	.375	4	CM10	1.98

- Wrench and screws are included
- Inserts must be ordered separately

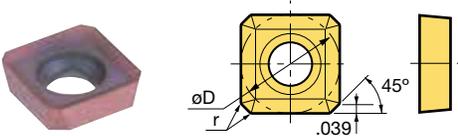

Indexable Inserts

Insert Model	ϕD	Nose Radius	Insert Grade			Insert Clamping Screw Set	Anti-seize Lubricant
			ACP200	ACP300	DS20		
CM10C1	.394	.008	○	—	○	S4S-T15	BN-5
CM10C1SE			○	—	—		

- Inserts are available in packages of 10 pcs.
- Please clarify the insert model and grade when ordering (ex: CM10C1ACP200)
- 10 screws and 1 wrench are included with Insert Clamping Screw Set
- It is recommended to regularly replace clamping screws and wrench to ensure the correct clamping force is maintained
- **SE** in the Insert Model means Sharp Edge Type

Insert Classifications

ACP200/ACP300	DS20
For all steel & stainless steel materials.	For aluminum & non-ferrous materials.
Multi-layer PVD coating on carbide base with nanoscale TiAlN & AlCrN. Excellent performance and wear resistance.	DLC coating on carbide base with very smooth surface for a low coefficient of friction. Excellent performance against built-up edge.



NEW!


Newly introduced SE (Sharp Edge) type!
 Sharp edge prevents burrs.
 Recommended for stainless steel & mild steel.

PL PRESETTER & FACE MILL TOOL HOLDER MATRIX

Exclusive Speed Finisher Presetter

Necessary for Cutting Edge Presetting

For quick adjustment in micron increments. Each cutting edge height is adjustable within 15 seconds.

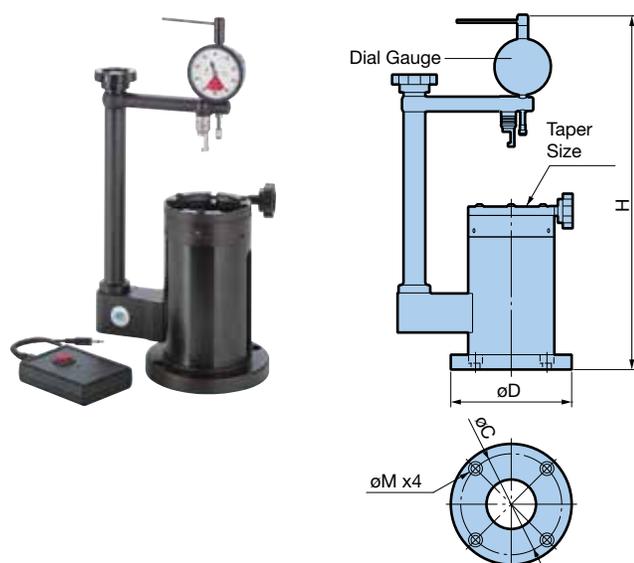

PL Presetter

Catalog Number	Taper Size	H	øD	øC	øM	Max Tool Length	Weight (lbs.)
PLP-BBT30	BBT30	≥16.417	4.803	4.016	.354 (for M8)	5.906	16.53
-BBT40	BBT40						16.76
-BBT50	BBT50	≥19.764	6.772	5.866	.433 (for M10)	6.299	38.58
-HSK63	HSK-A63	≥16.417	4.803	4.016	.354 (for M8)	5.906	16.98

- Dial gauge and indicator stabilizer are standard accessories (2 pcs. AAA batteries included)
- Min. leading of the accessory dial gauge is .001mm
- BT shank cannot be used
- Max tool length indicated in the table is the dimension from the gauge line of the arbor to the cutting edge
- Max cutter diameter is ø160mm

Face Mill Tool Holders

Face Mill Type			BBT			BCV		HSK				BIG CAPTO		
Cutter ø	Pilot ø	Body ø	30	40	50	40	50	50	63	100	125	C5	C6	C8
50	22	47	•	•	•	•	•	•	•	•	•	•	•	•
63	22	60	•	•	•	•	•	•	•	•	•	•	•	•
80	1.000"	2.20"	•	•	•	•	•	•	•	•	•	•	•	•
80	27	76	•	•	•	•	•	•	•	•	○	•	•	•
100	32	76/96	X	•	•	•	•	X	X	•	•	X	X	•
125	40	96	X	X	•	X	○	X	X	•	○	X	X	X
160	40	96	X	X	•	X	○	X	X	•	○	X	X	X

- Stock Standard
- X Not Available
- Available upon request

SMART DAMPER FACE MILL ARBOR TYPE FMH

Integrated Damping System

Maximizes potential of cutters for the highest productivity.

- For FMH22 & FMH27
- Modular design provides versatility

CENTER-THROUGH COOLANT



Face Milling of S55C (C55) with High Feed Cutter

Holder	Radial depth of cut (inches)				Result
	.20	.40	.78	1.18	
Standard Holder (w/o damping system)	○	×	×		6X deeper depth of cut
Integrated Damping System SMART DAMPER BBT50-SDF36-47-170 SDF36-FMH22DP-47-180	○	○	○		


× = Vibration ○ = Good

Cutting Conditions

Machine	Vertical Machining Center BBT50 (BIG-PLUS®)
Cutter	ø1.968" (4 inserts)
Speed	300 SFM
Feed	.040"/tooth
Depth	.08"
Overhang	13.67"

Combinations (Example of BBT50)

Select a suitable Basic Holder and Damper Head according to your application.

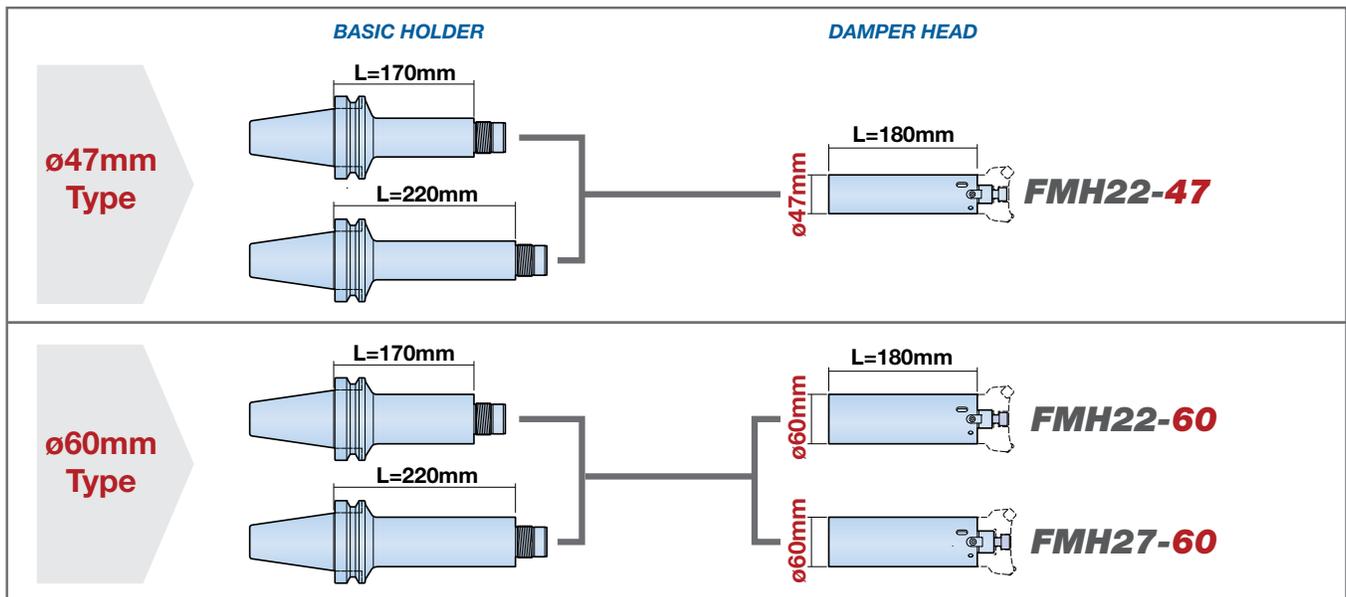

BIG KAISER[®]
PRECISION TOOLING INC.

2600 Huntington Blvd, Hoffman Estates, IL 60192
Phone: 847.228.7660 • Fax: 847.228.0881
www.bigkaiser.com • bigkaiser@bigkaiser.com